

# Fundamentals of Linear Elasticity

## Introductory Course on Multiphysics Modelling

**TOMASZ G. ZIELIŃSKI**

`multiphysics.ippt.pan.pl`

**Institute of Fundamental Technological Research  
of the Polish Academy of Sciences  
Warsaw • Poland**



# Outline

## 1 Introduction

# Outline

## 1 Introduction

## 2 Equations of motion

- Cauchy stress tensor
- Derivation from the Newton's second law
- Symmetry of stress tensor

# Outline

## 1 Introduction

## 2 Equations of motion

- Cauchy stress tensor
- Derivation from the Newton's second law
- Symmetry of stress tensor

## 3 Kinematic relations

- Strain measure and tensor (for small displacements)
- Strain compatibility equations

# Outline

## 1 Introduction

## 2 Equations of motion

- Cauchy stress tensor
- Derivation from the Newton's second law
- Symmetry of stress tensor

## 3 Kinematic relations

- Strain measure and tensor (for small displacements)
- Strain compatibility equations

## 4 Constitutive equations: Hooke's Law

- Original version
- Generalized formulation
- Voigt-Kelvin notation
- Thermoelastic constitutive relations

# Outline

## 1 Introduction

## 2 Equations of motion

- Cauchy stress tensor
- Derivation from the Newton's second law
- Symmetry of stress tensor

## 3 Kinematic relations

- Strain measure and tensor (for small displacements)
- Strain compatibility equations

## 4 Constitutive equations: Hooke's Law

- Original version
- Generalized formulation
- Voigt-Kelvin notation
- Thermoelastic constitutive relations

## 5 Problem of linear elasticity

- Initial-Boundary-Value Problem
- Displacement formulation of elastodynamics

# Outline

## 1 Introduction

## 2 Equations of motion

- Cauchy stress tensor
- Derivation from the Newton's second law
- Symmetry of stress tensor

## 3 Kinematic relations

- Strain measure and tensor (for small displacements)
- Strain compatibility equations

## 4 Constitutive equations: Hooke's Law

- Original version
- Generalized formulation
- Voigt-Kelvin notation
- Thermoelastic constitutive relations

## 5 Problem of linear elasticity

- Initial-Boundary-Value Problem
- Displacement formulation of elastodynamics

## 6 Principle of virtual work

# Outline

## 1 Introduction

## 2 Equations of motion

- Cauchy stress tensor
- Derivation from the Newton's second law
- Symmetry of stress tensor

## 3 Kinematic relations

- Strain measure and tensor (for small displacements)
- Strain compatibility equations

## 4 Constitutive equations: Hooke's Law

- Original version
- Generalized formulation
- Voigt-Kelvin notation
- Thermoelastic constitutive relations

## 5 Problem of linear elasticity

- Initial-Boundary-Value Problem
- Displacement formulation of elastodynamics

## 6 Principle of virtual work



# Introduction

## Two types of linearity in mechanics

- 1 Kinematic linearity** – strain-displacement relations are linear. This approach is valid if the **displacements are sufficiently small** (then higher order terms may be neglected).
- 2 Material linearity** – constitutive behaviour of material is described by a linear relation.

# Introduction

## Two types of linearity in mechanics

- 1 **Kinematic linearity** – strain-displacement relations are linear. This approach is valid if the **displacements are sufficiently small** (then higher order terms may be neglected).
- 2 **Material linearity** – constitutive behaviour of material is described by a linear relation.

In the **linear theory of elasticity**:

- both types of linearity exist,
- therefore, all the **governing equations are linear** with respect to the unknown fields,
- all these fields are therefore described with respect to the (initial) **undeformed configuration** (and one cannot distinguished between the Euler and Lagrange descriptions),
- (as in all linear theories) the **superposition principle** holds which can be extremely useful.

# Outline

## 1 Introduction

## 2 Equations of motion

- Cauchy stress tensor
- Derivation from the Newton's second law
- Symmetry of stress tensor

## 3 Kinematic relations

- Strain measure and tensor (for small displacements)
- Strain compatibility equations

## 4 Constitutive equations: Hooke's Law

- Original version
- Generalized formulation
- Voigt-Kelvin notation
- Thermoelastic constitutive relations


## 5 Problem of linear elasticity

- Initial-Boundary-Value Problem
- Displacement formulation of elastodynamics

## 6 Principle of virtual work

# Equations of motion

## Cauchy stress tensor

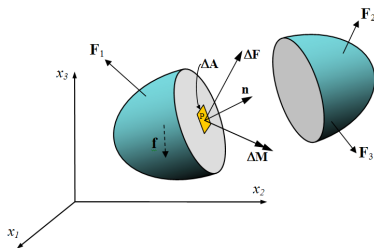


**Traction (or stress vector),  $t$   $\left[\frac{\text{N}}{\text{m}^2}\right]$**

$$t = \lim_{\Delta A \rightarrow 0} \frac{\Delta \mathbf{F}}{\Delta A} = \frac{d\mathbf{F}}{dA}$$

Here,  $\Delta \mathbf{F}$  is the vector of resultant force acting on the (infinitesimal) area  $\Delta A$ .

# Equations of motion

## Cauchy stress tensor

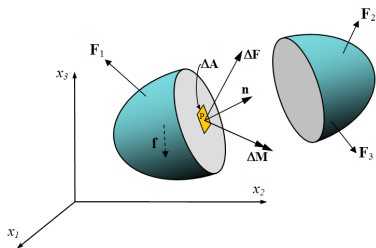

**Traction (or stress vector),  $t$  [ $\frac{N}{m^2}$ ]**

$$t = \lim_{\Delta A \rightarrow 0} \frac{\Delta \mathbf{F}}{\Delta A} = \frac{d\mathbf{F}}{dA}$$


Here,  $\Delta \mathbf{F}$  is the vector of resultant force acting on the (infinitesimal) area  $\Delta A$ .

## Cauchy's formula and tensor

$$\mathbf{t} = \boldsymbol{\sigma} \cdot \mathbf{n} \quad \text{or} \quad t_j = \sigma_{ij} n_i$$

Here,  $\mathbf{n}$  is the unit normal vector and  $\boldsymbol{\sigma}$  [ $\frac{N}{m^2}$ ] is the **Cauchy stress tensor**:

$$\boldsymbol{\sigma} \sim [\sigma_{ij}] = \begin{bmatrix} t^{(1)} \\ t^{(2)} \\ t^{(3)} \end{bmatrix} = \begin{bmatrix} \sigma_{11} & \sigma_{12} & \sigma_{13} \\ \sigma_{21} & \sigma_{22} & \sigma_{23} \\ \sigma_{31} & \sigma_{32} & \sigma_{33} \end{bmatrix}$$

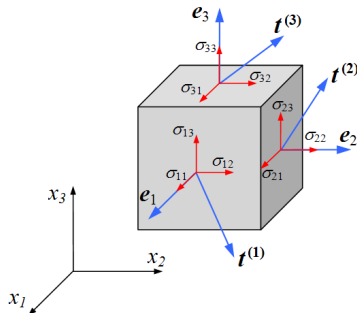

# Equations of motion


## Cauchy stress tensor

### Cauchy's formula and tensor

$$\mathbf{t} = \boldsymbol{\sigma} \cdot \mathbf{n} \quad \text{or} \quad t_j = \sigma_{ij} n_i$$

Here,  $\mathbf{n}$  is the unit normal vector and  $\boldsymbol{\sigma} \left[ \frac{\text{N}}{\text{m}^2} \right]$  is the **Cauchy stress tensor**:

$$\boldsymbol{\sigma} \sim [\sigma_{ij}] = \begin{bmatrix} \mathbf{t}^{(1)} \\ \mathbf{t}^{(2)} \\ \mathbf{t}^{(3)} \end{bmatrix} = \begin{bmatrix} \sigma_{11} & \sigma_{12} & \sigma_{13} \\ \sigma_{21} & \sigma_{22} & \sigma_{23} \\ \sigma_{31} & \sigma_{32} & \sigma_{33} \end{bmatrix}$$

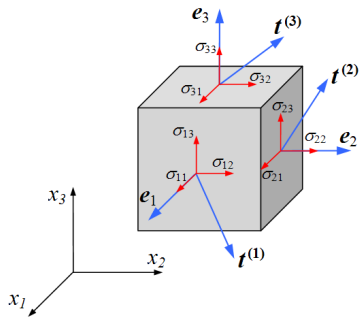

Surface tractions have three components: a direct stress normal to the surface and two shear stresses tangential to the surface.

- **Direct stresses** (normal tractions, e.g.,  $\sigma_{11}$ ) – tend to change the volume of the material (hydrostatic pressure) and are resisted by the body's bulk modulus.
- **Shear stress** (tangential tractions, e.g.,  $\sigma_{12}$ ,  $\sigma_{13}$ ) – tend to deform the material without changing its volume, and are resisted by the body's shear modulus.

# Equations of motion

## Derivation from the Newton's second law

### Principle of conservation of linear momentum

The time rate of **change of (linear) momentum** of particles equals the **net force** exerted on them:

$$\sum \frac{d(m \mathbf{v})}{dt} = \sum \mathbf{F}.$$

Here:  $m$  is the mass of particle,  $\mathbf{v}$  is the particle velocity, and  $\mathbf{F}$  is the net force acting on the particle.

# Equations of motion

## Derivation from the Newton's second law

### Principle of conservation of linear momentum

The time rate of **change of (linear) momentum** of particles equals the **net force** exerted on them:

$$\sum \frac{d(m \mathbf{v})}{dt} = \sum \mathbf{F}.$$

Here:  $m$  is the mass of particle,  $\mathbf{v}$  is the particle velocity, and  $\mathbf{F}$  is the net force acting on the particle.

For any (sub)domain  $\Omega$  of a solid continuum of density  $\varrho \left[ \frac{\text{kg}}{\text{m}^3} \right]$ , subject to body forces (per unit volume)  $\mathbf{f} \left[ \frac{\text{N}}{\text{m}^3} \right]$  and surface forces (per unit area)  $\mathbf{t} \left[ \frac{\text{N}}{\text{m}^2} \right]$  acting on the boundary  $\Gamma$ , the principle of conservation of linear momentum reads:

$$\int_{\Omega} \varrho \frac{\partial^2 \mathbf{u}}{\partial t^2} d\Omega = \int_{\Omega} \mathbf{f} d\Omega + \int_{\Gamma} \mathbf{t} d\Gamma,$$

where  $\mathbf{u} \left[ \text{m} \right]$  is the displacement vector.



# Equations of motion

## Derivation from the Newton's second law

For any (sub)domain  $\Omega$  of a solid continuum of density  $\varrho \left[ \frac{\text{kg}}{\text{m}^3} \right]$ , subject to body forces (per unit volume)  $\mathbf{f} \left[ \frac{\text{N}}{\text{m}^3} \right]$  and surface forces (per unit area)  $\mathbf{t} \left[ \frac{\text{N}}{\text{m}^2} \right]$  acting on the boundary  $\Gamma$ , the principle of conservation of linear momentum reads:

$$\int_{\Omega} \varrho \frac{\partial^2 \mathbf{u}}{\partial t^2} d\Omega = \int_{\Omega} \mathbf{f} d\Omega + \int_{\Gamma} \mathbf{t} d\Gamma,$$

where  $\mathbf{u} \left[ \text{m} \right]$  is the displacement vector. The **Cauchy's formula** and **divergence theorem** can be used for the last term, namely

$$\int_{\Gamma} \mathbf{t} d\Gamma = \int_{\Gamma} \boldsymbol{\sigma} \cdot \mathbf{n} d\Gamma = \int_{\Omega} \nabla \cdot \boldsymbol{\sigma} d\Omega.$$

# Equations of motion

## Derivation from the Newton's second law

For any (sub)domain  $\Omega$  of a solid continuum of density  $\varrho \left[ \frac{\text{kg}}{\text{m}^3} \right]$ , subject to body forces (per unit volume)  $\mathbf{f} \left[ \frac{\text{N}}{\text{m}^3} \right]$  and surface forces (per unit area)  $\mathbf{t} \left[ \frac{\text{N}}{\text{m}^2} \right]$  acting on the boundary  $\Gamma$ , the principle of conservation of linear momentum reads:

$$\int_{\Omega} \varrho \frac{\partial^2 \mathbf{u}}{\partial t^2} d\Omega = \int_{\Omega} \mathbf{f} d\Omega + \int_{\Gamma} \mathbf{t} d\Gamma,$$

where  $\mathbf{u} \left[ \text{m} \right]$  is the displacement vector. The **Cauchy's formula** and **divergence theorem** can be used for the last term, namely

$$\int_{\Gamma} \mathbf{t} d\Gamma = \int_{\Gamma} \boldsymbol{\sigma} \cdot \mathbf{n} d\Gamma = \int_{\Omega} \nabla \cdot \boldsymbol{\sigma} d\Omega.$$

### Global and local equations of motion

$$\int_{\Omega} \left( \nabla \cdot \boldsymbol{\sigma} + \mathbf{f} - \varrho \frac{\partial^2 \mathbf{u}}{\partial t^2} \right) d\Omega = \mathbf{0} \quad \rightarrow \quad \nabla \cdot \boldsymbol{\sigma} + \mathbf{f} = \varrho \frac{\partial^2 \mathbf{u}}{\partial t^2} \quad \text{or} \quad \sigma_{ji|j} + f_i = \varrho \ddot{u}_i.$$

The global form is true for *any* subdomain  $\Omega$ , which yields the local form.

# Equations of motion

## Symmetry of stress tensor

### Principle of conservation of angular momentum

The time rate of **change of the total moment of momentum** for a system of particles is equal to the vector **sum of the moments of external forces** acting on them:

$$\sum \frac{d(m \mathbf{v} \times \mathbf{x})}{dt} = \sum \mathbf{F} \times \mathbf{x} .$$

# Equations of motion

## Symmetry of stress tensor

### Principle of conservation of angular momentum

The time rate of **change of the total moment of momentum** for a system of particles is equal to the vector **sum of the moments of external forces** acting on them:

$$\sum \frac{d(m \mathbf{v} \times \mathbf{x})}{dt} = \sum \mathbf{F} \times \mathbf{x}.$$

For continuum, in the absence of body couples (i.e., without volume-dependent couples), the principle leads to **the symmetry of stress tensor**, that is,

$$\boldsymbol{\sigma} = \boldsymbol{\sigma}^T \quad \text{or} \quad \sigma_{ij} = \sigma_{ji}.$$

Thus, only six (of nine) stress components are independent:

$$\boldsymbol{\sigma} \sim [\sigma_{ij}] = \begin{bmatrix} \sigma_{11} & \sigma_{12} & \sigma_{13} \\ & \sigma_{22} & \sigma_{23} \\ \text{sym.} & & \sigma_{33} \end{bmatrix}.$$

# Outline

## 1 Introduction

## 2 Equations of motion

- Cauchy stress tensor
- Derivation from the Newton's second law
- Symmetry of stress tensor

## 3 Kinematic relations

- Strain measure and tensor (for small displacements)
- Strain compatibility equations

## 4 Constitutive equations: Hooke's Law

- Original version
- Generalized formulation
- Voigt-Kelvin notation
- Thermoelastic constitutive relations

## 5 Problem of linear elasticity

- Initial-Boundary-Value Problem
- Displacement formulation of elastodynamics


## 6 Principle of virtual work

# Kinematic relations

## Strain measure and tensor (for small displacements)

**Longitudinal strain** (global and local)  
is defined as follows:

$$\varepsilon = \frac{L' - L}{L}, \quad \varepsilon(x) = \frac{dx' - dx}{dx} = \frac{du}{dx}.$$


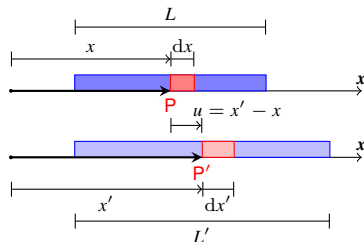


# Kinematic relations

## Strain measure and tensor (for small displacements)

**Longitudinal strain** (global and local)  
is defined as follows:

$$\varepsilon = \frac{L' - L}{L}, \quad \varepsilon(x) = \frac{dx' - dx}{dx} = \frac{du}{dx}.$$

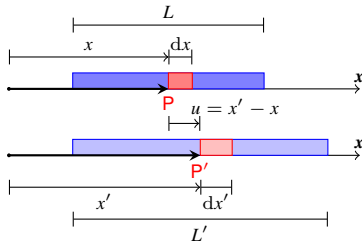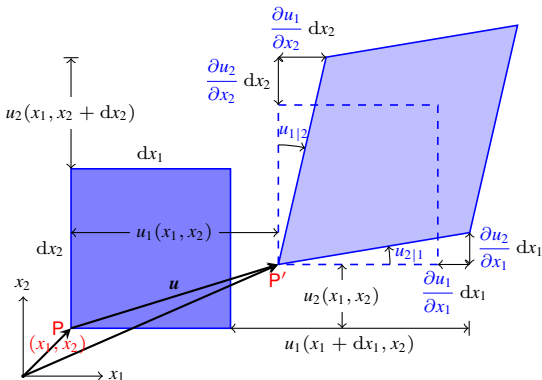

### Strain tensor

$$\varepsilon = \text{sym}(\nabla \mathbf{u}) = \frac{1}{2} (\nabla \mathbf{u} + \nabla \mathbf{u}^T),$$

$$\varepsilon_{ij} = \frac{1}{2} (u_{i|j} + u_{j|i}),$$

$$\varepsilon \sim [\varepsilon_{ij}] = \begin{bmatrix} \varepsilon_{11} & \varepsilon_{12} & \varepsilon_{13} \\ \text{sym.} & \varepsilon_{22} & \varepsilon_{23} \\ & & \varepsilon_{33} \end{bmatrix}.$$

# Kinematic relations

## Strain compatibility equations

- In the strain-displacement relationships, there are 6 strain measures but only 3 independent displacements.



# Kinematic relations

## Strain compatibility equations

- In the strain-displacement relationships, there are 6 strain measures but only 3 independent displacements.
- If  $\varepsilon_{ij}$  are given as functions of  $x$ , they **cannot be arbitrary**: they should have a relationship such that the 6 strain-displacement equations are **compatible**.

# Kinematic relations

## Strain compatibility equations

- In the strain-displacement relationships, there are 6 strain measures but only 3 independent displacements.
- If  $\varepsilon_{ij}$  are given as functions of  $x$ , they **cannot be arbitrary**: they should have a relationship such that the 6 strain-displacement equations are **compatible**.

### 2D case:

$$u_{1|1} = \varepsilon_{11} , \quad u_{2|2} = \varepsilon_{22} , \quad u_{1|2} + u_{2|1} = 2\varepsilon_{12} ,$$

Here,  $\varepsilon_{11}$ ,  $\varepsilon_{22}$ ,  $\varepsilon_{12}$  must satisfy the following **compatibility equation**:

$$\varepsilon_{11|22} + \varepsilon_{22|11} = 2\varepsilon_{12|12} .$$

# Kinematic relations

## Strain compatibility equations

- In the strain-displacement relationships, there are 6 strain measures but only 3 independent displacements.
- If  $\varepsilon_{ij}$  are given as functions of  $x$ , they **cannot be arbitrary**: they should have a relationship such that the 6 strain-displacement equations are **compatible**.

### 2D case:

$$u_{1|1} = \varepsilon_{11} , \quad u_{2|2} = \varepsilon_{22} , \quad u_{1|2} + u_{2|1} = 2\varepsilon_{12} ,$$

Here,  $\varepsilon_{11}$ ,  $\varepsilon_{22}$ ,  $\varepsilon_{12}$  must satisfy the following **compatibility equation**:

$$\varepsilon_{11|22} + \varepsilon_{22|11} = 2\varepsilon_{12|12} .$$

### 3D case:

$$\varepsilon_{ij|kl} + \varepsilon_{kl|ij} = \varepsilon_{lj|ki} + \varepsilon_{ki|lj} .$$

Of these 81 equations only 6 are different (i.e., linearly independent).

# Kinematic relations

## Strain compatibility equations

- In the strain-displacement relationships, there are 6 strain measures but only 3 independent displacements.
- If  $\varepsilon_{ij}$  are given as functions of  $x$ , they **cannot be arbitrary**: they should have a relationship such that the 6 strain-displacement equations are **compatible**.

### 2D case:

$$u_{1|1} = \varepsilon_{11}, \quad u_{2|2} = \varepsilon_{22}, \quad u_{1|2} + u_{2|1} = 2\varepsilon_{12},$$

Here,  $\varepsilon_{11}$ ,  $\varepsilon_{22}$ ,  $\varepsilon_{12}$  must satisfy the following **compatibility equation**:

$$\varepsilon_{11|22} + \varepsilon_{22|11} = 2\varepsilon_{12|12}.$$

### 3D case:

$$\varepsilon_{ij|kl} + \varepsilon_{kl|ij} = \varepsilon_{lj|ki} + \varepsilon_{ki|lj}.$$

Of these 81 equations only 6 are different (i.e., linearly independent).

The strain **compatibility equations are satisfied** automatically when the **strains are computed from a displacement field**.

# Outline

## 1 Introduction

## 2 Equations of motion

- Cauchy stress tensor
- Derivation from the Newton's second law
- Symmetry of stress tensor

## 3 Kinematic relations

- Strain measure and tensor (for small displacements)
- Strain compatibility equations

## 4 Constitutive equations: Hooke's Law

- Original version
- Generalized formulation
- Voigt-Kelvin notation
- Thermoelastic constitutive relations

## 5 Problem of linear elasticity

- Initial-Boundary-Value Problem
- Displacement formulation of elastodynamics

## 6 Principle of virtual work

# Constitutive equations: Hooke's Law

## Original version

### Original formulation of Hooke's Law (1660)

**Robert Hooke** (1635-1703) first presented his law in the form of a Latin anagram

$$CEIINOSSITTUV = UT TENSIO, SIC VIS$$

which translates to “*as is the extension, so is the force*” or in contemporary language “*extension is directly proportional to force*”.

# Constitutive equations: Hooke's Law

## Original version

### Original formulation of Hooke's Law (1660)

**Robert Hooke** (1635-1703) first presented his law in the form of a Latin anagram

$$CEIINOSSITTUV = UT TENSIO, SIC VIS$$

which translates to “*as is the extension, so is the force*” or in contemporary language “*extension is directly proportional to force*”.

The classical (1-dimensional) Hooke's Law describe the linear variation of tension with extension in an elastic spring:

$$F = k u \quad \text{or} \quad \sigma = E \varepsilon .$$

Here:

- $F$  is the **force** acting on the spring, whereas  $\sigma$  is the **tension**,
- $k$  is the **spring constant**, whereas  $E$  is the **Young's modulus**,
- $u$  is the displacement (of the spring end), and  $\varepsilon$  is the **extension** (elongation).

# Constitutive equations: Hooke's Law

## Generalized formulation

### Generalized Hooke's Law (GHL)

$$\boldsymbol{\sigma} = \boldsymbol{C} : \boldsymbol{\varepsilon} \quad \text{or} \quad \boldsymbol{\varepsilon} = \boldsymbol{S} : \boldsymbol{\sigma} \quad \text{where} \quad \boldsymbol{S} = \boldsymbol{C}^{-1} .$$

Here:  $\boldsymbol{C}$  [N/m<sup>2</sup>] is the (fourth-order) **elasticity tensor**,  
 $\boldsymbol{S}$  [m<sup>2</sup>/N] is the **compliance tensor** (inverse of  $\boldsymbol{C}$ ).

**GHL** in index notation:

$$\sigma_{ij} = C_{ijkl} \varepsilon_{kl} \quad \text{or} \quad \varepsilon_{ij} = S_{ijkl} \sigma_{kl} .$$



# Constitutive equations: Hooke's Law

## Generalized formulation

### Generalized Hooke's Law (GHL)

$$\boldsymbol{\sigma} = \boldsymbol{C} : \boldsymbol{\varepsilon} \quad \text{or} \quad \boldsymbol{\varepsilon} = \boldsymbol{S} : \boldsymbol{\sigma} \quad \text{where} \quad \boldsymbol{S} = \boldsymbol{C}^{-1}.$$

Here:  $\boldsymbol{C}$  [N/m<sup>2</sup>] is the (fourth-order) **elasticity tensor**,  
 $\boldsymbol{S}$  [m<sup>2</sup>/N] is the **compliance tensor** (inverse of  $\boldsymbol{C}$ ).

**GHL** in index notation:

$$\sigma_{ij} = C_{ijkl} \varepsilon_{kl} \quad \text{or} \quad \varepsilon_{ij} = S_{ijkl} \sigma_{kl}.$$

### Symmetries of elastic tensor

$$C_{ijkl} = C_{klij}, \quad C_{ijkl} = C_{jikl}, \quad C_{ijkl} = C_{ijlk}.$$

- The first symmetry is valid for the so-called **hyperelastic** materials (for which the stress-strain relationship derives from a strain energy density function).
- Thus, at most, only **21** material constants out of 81 components are independent.

# Constitutive equations: Hooke's Law

## Generalized formulation

### Generalized Hooke's Law (GHL)

$$\boldsymbol{\sigma} = \boldsymbol{C} : \boldsymbol{\varepsilon} \quad \text{or} \quad \boldsymbol{\varepsilon} = \boldsymbol{S} : \boldsymbol{\sigma} \quad \text{where} \quad \boldsymbol{S} = \boldsymbol{C}^{-1}.$$

Here:  $\boldsymbol{C}$  [N/m<sup>2</sup>] is the (fourth-order) **elasticity tensor**,  
 $\boldsymbol{S}$  [m<sup>2</sup>/N] is the **compliance tensor** (inverse of  $\boldsymbol{C}$ ).

**GHL** in index notation:

$$\sigma_{ij} = C_{ijkl} \varepsilon_{kl} \quad \text{or} \quad \varepsilon_{ij} = S_{ijkl} \sigma_{kl}.$$

### Hooke's Law for an isotropic material

$$\boldsymbol{\sigma} = 2\mu \boldsymbol{\varepsilon} + \lambda (\text{tr } \boldsymbol{\varepsilon}) \boldsymbol{I} \quad \text{or} \quad \sigma_{ij} = 2\mu \varepsilon_{ij} + \lambda \varepsilon_{kk} \delta_{ij}.$$

Here, the so-called **Lamé coefficients** are used (related to the **Young's modulus**  $E$  and **Poisson's ratio**  $\nu$ ):

- the **shear modulus**  $\mu = \frac{E}{2(1+\nu)}$ ,
- the **dilatational constant**  $\lambda = \frac{\nu E}{(1+\nu)(1-2\nu)}$ .

# Constitutive equations: Hooke's Law

## Voigt-Kelvin notation

### Rule of change of subscripts

$$11 \rightarrow 1, \quad 22 \rightarrow 2, \quad 33 \rightarrow 3, \quad 23 \rightarrow 4, \quad 13 \rightarrow 5, \quad 12 \rightarrow 6.$$

### Anisotropy (21 independent material constants)

$$\begin{Bmatrix} \sigma_1 = \sigma_{11} \\ \sigma_2 = \sigma_{22} \\ \sigma_3 = \sigma_{33} \\ \sigma_4 = \sigma_{23} \\ \sigma_5 = \sigma_{13} \\ \sigma_6 = \sigma_{12} \end{Bmatrix} = \begin{bmatrix} C_{11} & C_{12} & C_{13} & C_{14} & C_{15} & C_{16} \\ & C_{22} & C_{23} & C_{24} & C_{25} & C_{26} \\ & & C_{33} & C_{34} & C_{35} & C_{36} \\ & & & C_{44} & C_{45} & C_{46} \\ & \text{sym.} & & & C_{55} & C_{56} \\ & & & & & C_{66} \end{bmatrix} \begin{Bmatrix} \varepsilon_1 = \varepsilon_{11} \\ \varepsilon_2 = \varepsilon_{22} \\ \varepsilon_3 = \varepsilon_{33} \\ \varepsilon_4 = \gamma_{23} = 2\varepsilon_{23} \\ \varepsilon_5 = \gamma_{13} = 2\varepsilon_{13} \\ \varepsilon_6 = \gamma_{12} = 2\varepsilon_{12} \end{Bmatrix}$$

Notice that the elastic strain energy per unit volume equals:

$$\frac{1}{2} \sigma_{ij} \varepsilon_{ij} = \frac{1}{2} \sigma_{\alpha} \varepsilon_{\alpha} \quad (\text{with summation here over } i, j = 1, 2, 3 \text{ and } \alpha = 1, \dots, 6).$$

### Orthotropy (9 nonzero independent material constants)

### Transversal isotropy (5 independent out of 9 nonzero components)

### Isotropy (2 independent material constants)

# Constitutive equations: Hooke's Law

## Voigt-Kelvin notation

### Rule of change of subscripts

$$11 \rightarrow 1, \quad 22 \rightarrow 2, \quad 33 \rightarrow 3, \quad 23 \rightarrow 4, \quad 13 \rightarrow 5, \quad 12 \rightarrow 6.$$

**Anisotropy** (21 independent material constants)

**Orthotropy** (9 nonzero independent material constants)

$$\begin{Bmatrix} \sigma_{11} \\ \sigma_{22} \\ \sigma_{33} \\ \sigma_{23} \\ \sigma_{13} \\ \sigma_{12} \end{Bmatrix} = \begin{bmatrix} C_{11} & C_{12} & C_{13} & 0 & 0 & 0 \\ & C_{22} & C_{23} & 0 & 0 & 0 \\ & & C_{33} & 0 & 0 & 0 \\ & & & C_{44} & 0 & 0 \\ & \text{sym.} & & & C_{55} & 0 \\ & & & & & C_{66} \end{bmatrix} \begin{Bmatrix} \varepsilon_{11} \\ \varepsilon_{22} \\ \varepsilon_{33} \\ 2\varepsilon_{23} \\ 2\varepsilon_{13} \\ 2\varepsilon_{12} \end{Bmatrix}$$

Notice that there is no interaction between the normal stresses and the shear strains.

**Transversal isotropy** (5 independent out of 9 nonzero components)

**Isotropy** (2 independent material constants)

# Constitutive equations: Hooke's Law

## Vaigt-Kelvin notation

### Rule of change of subscripts

$$11 \rightarrow 1, \quad 22 \rightarrow 2, \quad 33 \rightarrow 3, \quad 23 \rightarrow 4, \quad 13 \rightarrow 5, \quad 12 \rightarrow 6.$$

**Anisotropy** (21 independent material constants)

**Orthotropy** (9 nonzero independent material constants)

**Transversal isotropy** (5 independent out of 9 nonzero components)

$$\begin{Bmatrix} \sigma_{11} \\ \sigma_{22} \\ \sigma_{33} \\ \sigma_{23} \\ \sigma_{13} \\ \sigma_{12} \end{Bmatrix} = \begin{bmatrix} C_{11} & C_{12} & C_{13} & 0 & 0 & 0 \\ & C_{11} & C_{13} & 0 & 0 & 0 \\ & & C_{33} & 0 & 0 & 0 \\ & & & C_{44} & 0 & 0 \\ & \text{sym.} & & & C_{44} & 0 \\ & & & & & \frac{C_{11}-C_{12}}{2} \end{bmatrix} \begin{Bmatrix} \varepsilon_{11} \\ \varepsilon_{22} \\ \varepsilon_{33} \\ 2\varepsilon_{23} \\ 2\varepsilon_{13} \\ 2\varepsilon_{12} \end{Bmatrix}$$

$$C_{22} = C_{11}, \quad C_{23} = C_{13}, \quad C_{55} = C_{44}, \quad C_{66} = \frac{C_{11} - C_{12}}{2}.$$

**Isotropy** (2 independent material constants)

# Constitutive equations: Hooke's Law

## Voigt-Kelvin notation

### Rule of change of subscripts

$$11 \rightarrow 1, \quad 22 \rightarrow 2, \quad 33 \rightarrow 3, \quad 23 \rightarrow 4, \quad 13 \rightarrow 5, \quad 12 \rightarrow 6.$$

**Anisotropy** (21 independent material constants)

**Orthotropy** (9 nonzero independent material constants)

**Transversal isotropy** (5 independent out of 9 nonzero components)

**Isotropy** (2 independent material constants)

$$\begin{Bmatrix} \sigma_{11} \\ \sigma_{22} \\ \sigma_{33} \\ \sigma_{23} \\ \sigma_{13} \\ \sigma_{12} \end{Bmatrix} = \begin{bmatrix} \lambda + 2\mu & \lambda & \lambda & 0 & 0 & 0 \\ & \lambda + 2\mu & \lambda & 0 & 0 & 0 \\ & & \lambda + 2\mu & 0 & 0 & 0 \\ & & & \mu & 0 & 0 \\ & \text{sym.} & & & \mu & 0 \\ & & & & & \mu \end{bmatrix} \begin{Bmatrix} \varepsilon_{11} \\ \varepsilon_{22} \\ \varepsilon_{33} \\ 2\varepsilon_{23} \\ 2\varepsilon_{13} \\ 2\varepsilon_{12} \end{Bmatrix}$$

# Constitutive equations: Hooke's Law

## Voigt-Kelvin notation

### Rule of change of subscripts

$$11 \rightarrow 1, \quad 22 \rightarrow 2, \quad 33 \rightarrow 3, \quad 23 \rightarrow 4, \quad 13 \rightarrow 5, \quad 12 \rightarrow 6.$$

**Anisotropy** (21 independent material constants)

**Orthotropy** (9 nonzero independent material constants)

**Transversal isotropy** (5 independent out of 9 nonzero components)

**Isotropy** (2 independent material constants)

$$\begin{Bmatrix} \sigma_{11} \\ \sigma_{22} \\ \sigma_{33} \\ \sigma_{23} \\ \sigma_{13} \\ \sigma_{12} \end{Bmatrix} = \frac{E}{(1+\nu)(1-2\nu)} \begin{bmatrix} 1-\nu & \nu & \nu & 0 & 0 & 0 \\ & 1-\nu & \nu & 0 & 0 & 0 \\ & & 1-\nu & 0 & 0 & 0 \\ & & & \frac{1-2\nu}{2} & 0 & 0 \\ & \text{sym.} & & & \frac{1-2\nu}{2} & 0 \\ & & & & & \frac{1-2\nu}{2} \end{bmatrix} \begin{Bmatrix} \varepsilon_{11} \\ \varepsilon_{22} \\ \varepsilon_{33} \\ 2\varepsilon_{23} \\ 2\varepsilon_{13} \\ 2\varepsilon_{12} \end{Bmatrix}$$

# Constitutive equations: Hooke's Law

## Thermoelastic constitutive relations

- **Temperature changes** in the elastic body **cause thermal expansion** of the material, even though the variation of elastic constants with temperature is neglected.



# Constitutive equations: Hooke's Law

## Thermoelastic constitutive relations

- **Temperature changes** in the elastic body **cause thermal expansion** of the material, even though the variation of elastic constants with temperature is neglected.
- When the strains, geometric changes, and temperature **variations are sufficiently small** all governing equations are linear and **superposition of mechanical and thermal effects** is possible.

# Constitutive equations: Hooke's Law

## Thermoelastic constitutive relations

- **Temperature changes** in the elastic body **cause thermal expansion** of the material, even though the variation of elastic constants with temperature is neglected.
- When the strains, geometric changes, and temperature **variations are sufficiently small** all governing equations are linear and **superposition of mechanical and thermal effects** is possible.

### Uncoupled thermoelasticity (theory of thermal stresses)

Usually, the above assumptions are satisfied and the thermo-mechanical problem (involving heat transfer) can be dealt as follows:

- 1 the heat equations are uncoupled from the (elastic) mechanical equations and are solved first,
- 2 the computed temperature field is used as data ("thermal loads") for the mechanical problem.

# Constitutive equations: Hooke's Law

## Thermoelastic constitutive relations

- **Temperature changes** in the elastic body **cause thermal expansion** of the material, even though the variation of elastic constants with temperature is neglected.
- When the strains, geometric changes, and temperature **variations are sufficiently small** all governing equations are linear and **superposition of mechanical and thermal effects** is possible.

### Uncoupled thermoelasticity (theory of thermal stresses)

Usually, the above assumptions are satisfied and the thermo-mechanical problem (involving heat transfer) can be dealt as follows:

- 1 the heat equations are uncoupled from the (elastic) mechanical equations and are solved first,
- 2 the computed temperature field is used as data ("thermal loads") for the mechanical problem.

If the thermoelastic dissipation significantly influence the thermal field the **fully coupled theory of thermo-elasticity** must be applied, where the coupled heat and mechanical equations are solved simultaneously.

# Constitutive equations: Hooke's Law

## Thermoelastic constitutive relations

### GHL with linear thermal terms (thermal stresses)

$$\boldsymbol{\sigma} = \mathbf{C} : [\boldsymbol{\varepsilon} - \boldsymbol{\alpha} \Delta T] = \mathbf{C} : \boldsymbol{\varepsilon} - \underbrace{\mathbf{C} : \boldsymbol{\alpha} \Delta T}_{\text{thermal stress}} \quad \text{or} \quad \boldsymbol{\varepsilon} = \mathbf{S} : \boldsymbol{\sigma} + \underbrace{\boldsymbol{\alpha} \Delta T}_{\text{thermal strain}},$$

or in index notation

$$\sigma_{ij} = C_{ijkl} [\varepsilon_{kl} - \alpha_{kl} \Delta T] \quad \text{or} \quad \varepsilon_{ij} = S_{ijkl} \sigma_{kl} + \alpha_{ij} \Delta T.$$

Here,  $\Delta T$  [K] is the temperature difference (from the reference temperature of the undeformed body), whereas the tensor  $\alpha$  [K<sup>-1</sup>] groups **linear coefficients of thermal expansion**

$$\boldsymbol{\alpha} \sim [\alpha_{ij}] = \begin{bmatrix} \alpha_{11} & 0 & 0 \\ 0 & \alpha_{22} & 0 \\ 0 & 0 & \alpha_{33} \end{bmatrix}.$$

For **isotropic materials**:  $\alpha_{11} = \alpha_{22} = \alpha_{33} \equiv \alpha$ , that is,  $\boldsymbol{\alpha} = \alpha \mathbf{I}$  or  $\alpha_{ij} = \alpha \delta_{ij}$ .

# Outline

## 1 Introduction

## 2 Equations of motion

- Cauchy stress tensor
- Derivation from the Newton's second law
- Symmetry of stress tensor

## 3 Kinematic relations

- Strain measure and tensor (for small displacements)
- Strain compatibility equations

## 4 Constitutive equations: Hooke's Law

- Original version
- Generalized formulation
- Voigt-Kelvin notation
- Thermoelastic constitutive relations

## 5 Problem of linear elasticity

- Initial-Boundary-Value Problem
- Displacement formulation of elastodynamics

## 6 Principle of virtual work

# Problem of linear elasticity

## Initial-Boundary-Value Problem of elastodynamics

### General IBVP of elastodynamics

Find **15** unknown fields:  $u_i$  (**3** displacements),  $\varepsilon_{ij}$  (**6** strains), and  $\sigma_{ij}$  (**6** stresses) – satisfying:

- **3** equations of motion:  $\sigma_{ij|j} + f_i = \rho \ddot{u}_i$ ,
- **6** strain-displacement relations:  $\varepsilon_{ij} = \frac{1}{2}(u_{i|j} + u_{j|i})$ ,
- **6** stress-strain laws:  $\sigma_{ij} = C_{ijkl} \varepsilon_{kl}$ ,

with the **initial conditions** (at  $t = t_0$ ):

$$u_i(\mathbf{x}, t_0) = u_i^0(\mathbf{x}) \quad \text{and} \quad \dot{u}_i(\mathbf{x}, t_0) = v_i^0(\mathbf{x}) \quad \text{in } \Omega,$$

and subject to the **boundary conditions**:

$$u_i(\mathbf{x}, t) = \hat{u}_i(\mathbf{x}, t) \quad \text{on } \Gamma_u, \quad \sigma_{ij}(\mathbf{x}, t) n_j = \hat{t}_i(\mathbf{x}, t) \quad \text{on } \Gamma_t,$$

$$\sigma_{ij}(\mathbf{x}, t) n_j = \hat{t}_i + h(\hat{u}_i - u_i) \quad \text{on } \Gamma_h,$$

where  $\Gamma_u \cup \Gamma_t \cup \Gamma_h = \Gamma$ , and  $\Gamma_u \cap \Gamma_t = \emptyset$ ,  $\Gamma_u \cap \Gamma_h = \emptyset$ ,  $\Gamma_t \cap \Gamma_h = \emptyset$ .

# Problem of linear elasticity

## Displacement formulation of elastodynamics

**Anisotropic case:**

$$\sigma_{ij} = C_{ijkl} \varepsilon_{kl} = C_{ijkl} \frac{1}{2} (u_{k|l} + u_{l|k}) = C_{ijkl} u_{k|l} \quad (\text{since } C_{ijkl} = C_{ijlk})$$

## Displacement formulation of elastodynamics

$$(C_{ijkl} u_{k|l})_{|j} + f_i = \varrho \ddot{u}_i \quad \text{or} \quad \nabla \cdot (\mathbf{C} : \nabla \mathbf{u}) + \mathbf{f} = \varrho \ddot{\mathbf{u}}$$

# Problem of linear elasticity

## Displacement formulation of elastodynamics

**Anisotropic case:**

$$\sigma_{ij} = C_{ijkl} \varepsilon_{kl} = C_{ijkl} \frac{1}{2} (u_{k|l} + u_{l|k}) = C_{ijkl} u_{k|l} \quad (\text{since } C_{ijkl} = C_{ijlk})$$

## Displacement formulation of elastodynamics

$$(C_{ijkl} u_{k|l})_{|j} + f_i = \varrho \ddot{u}_i \quad \text{or} \quad \nabla \cdot (\mathbf{C} : \nabla \mathbf{u}) + \mathbf{f} = \varrho \ddot{\mathbf{u}}$$

**Isotropic case:**

$$\sigma_{ij} = 2\mu \varepsilon_{ij} + \lambda \varepsilon_{kk} \delta_{ij} = \mu (u_{i|j} + u_{j|i}) + \lambda u_{k|k} \delta_{ij}$$

## Navier's equations for isotropic elasticity

For homogeneous materials (i.e., when  $\mu = \text{const.}$  and  $\lambda = \text{const.}$ ):

$$\mu u_{i|jj} + (\mu + \lambda) u_{j|ji} + f_i = \varrho \ddot{u}_i \quad \text{or} \quad \mu \Delta \mathbf{u} + (\mu + \lambda) \nabla (\nabla \cdot \mathbf{u}) + \mathbf{f} = \varrho \ddot{\mathbf{u}}$$



# Problem of linear elasticity

## Displacement formulation of elastodynamics

**Anisotropic case:**

### Displacement formulation of elastodynamics

$$(C_{ijkl} u_{k|l})_{|j} + f_i = \varrho \ddot{u}_i \quad \text{or} \quad \nabla \cdot (\mathbf{C} : \nabla \mathbf{u}) + \mathbf{f} = \varrho \ddot{\mathbf{u}}$$

**Isotropic case:**

### Navier's equations for isotropic elasticity

For homogeneous materials (i.e., when  $\mu = \text{const.}$  and  $\lambda = \text{const.}$ ):

$$\mu u_{i|jj} + (\mu + \lambda) u_{j|ji} + f_i = \varrho \ddot{u}_i \quad \text{or} \quad \mu \Delta \mathbf{u} + (\mu + \lambda) \nabla (\nabla \cdot \mathbf{u}) + \mathbf{f} = \varrho \ddot{\mathbf{u}}$$

**Boundary conditions:**

**(Dirichlet)**

$$u_i = \hat{u}_i \text{ on } \Gamma_u,$$

**(Neumann)**

$$t_i = \hat{t}_i \text{ on } \Gamma_t,$$

**(Robin)**

$$t_i = \hat{t}_i + h(\hat{u}_i - u_i) \text{ on } \Gamma_h,$$

$$t_i = \sigma_{ij} n_j = \begin{cases} C_{ijkl} u_{k|l} n_j & \text{-- for anisotropic materials,} \\ \mu(u_{i|i} + u_{i|i}) n_i + \lambda u_{k|k} n_i & \text{-- for isotropic materials.} \end{cases}$$

# Outline

## 1 Introduction

## 2 Equations of motion

- Cauchy stress tensor
- Derivation from the Newton's second law
- Symmetry of stress tensor

## 3 Kinematic relations

- Strain measure and tensor (for small displacements)
- Strain compatibility equations

## 4 Constitutive equations: Hooke's Law

- Original version
- Generalized formulation
- Voigt-Kelvin notation
- Thermoelastic constitutive relations

## 5 Problem of linear elasticity

- Initial-Boundary-Value Problem
- Displacement formulation of elastodynamics

## 6 Principle of virtual work

# Principle of virtual work

## Admissible and virtual displacements

### Definition (Admissible displacements)

**Admissible displacements** (or configuration) of a mechanical system are any displacements (configuration) that satisfy the *geometric constraints* of the system. The **geometric constraints** are:

- geometric (essential) boundary conditions,
- kinematic relations (strain-displacement equations and compatibility equations).

Of all (kinematically) admissible configurations only one corresponds to the equilibrium configuration under the applied loads (it is the one that also satisfies Newton's second law).

# Principle of virtual work

## Admissible and virtual displacements

### Definition (Admissible displacements)

**Admissible displacements** (or configuration) of a mechanical system are any displacements (configuration) that satisfy the *geometric constraints* of the system. The **geometric constraints** are:


- geometric (essential) boundary conditions,
- kinematic relations (strain-displacement equations and compatibility equations).


Of all (kinematically) admissible configurations only one corresponds to the equilibrium configuration under the applied loads (it is the one that also satisfies Newton's second law).

### Definition (Virtual displacements)


**Virtual displacements** are any displacements that describe small (infinitesimal) *variations* of the true configurations. They satisfy the *homogeneous* form of the specified *geometric boundary conditions*.


# Principle of virtual work

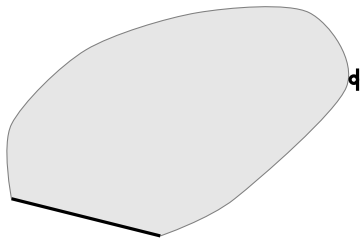

 undeformed configuration,  $u = 0$


# Principle of virtual work

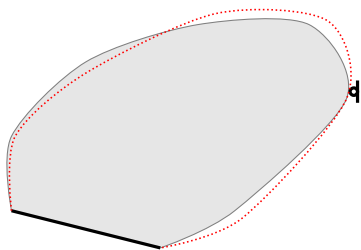

 undeformed configuration,  $u = 0$

 virtual displacements,  $\delta u$

# Principle of virtual work

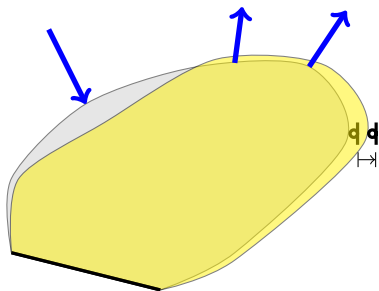


□ undeformed configuration,  $u = 0$

→ external forces (loads)

↔ geometric constraint

□ actual configuration,  $u = \bar{u}$

# Principle of virtual work

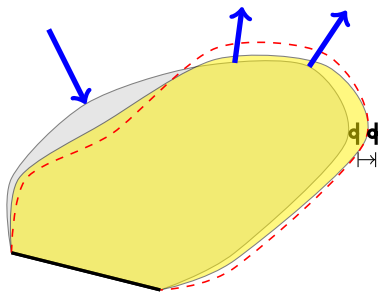

undeformed configuration,  $\mathbf{u} = \mathbf{0}$

external forces (loads)


geometric constraint

actual configuration,  $\mathbf{u} = \bar{\mathbf{u}}$

admissible configuration,  $\mathbf{u} = \bar{\mathbf{u}} + \delta \mathbf{u}$



# Principle of virtual work

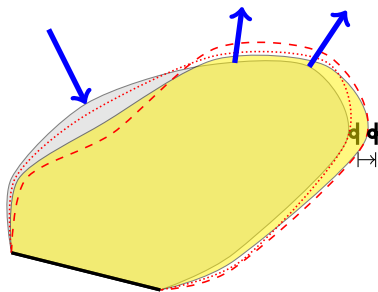

☐ undeformed configuration,  $\mathbf{u} = \mathbf{0}$

➔ external forces (loads)


↔ geometric constraint







☐ actual configuration,  $\mathbf{u} = \bar{\mathbf{u}}$

⋯ virtual displacements,  $\delta \mathbf{u}$

- - - admissible configuration,  $\mathbf{u} = \bar{\mathbf{u}} + \delta \mathbf{u}$
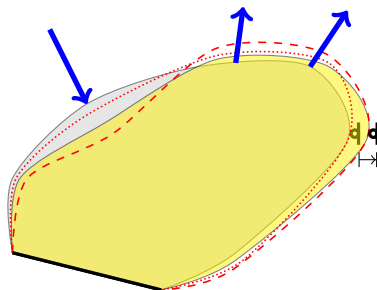
# Principle of virtual work




-  undeformed configuration,  $\mathbf{u} = \mathbf{0}$
-  external forces (loads)
-  geometric constraint
-  actual configuration,  $\mathbf{u} = \bar{\mathbf{u}}$
-  virtual displacements,  $\delta \mathbf{u}$
-  admissible configuration,  $\mathbf{u} = \bar{\mathbf{u}} + \delta \mathbf{u}$

## Definition (Virtual work)

**Virtual work** is the work done by the actual forces through the virtual displacement of the actual configuration. The virtual work in a deformable body consists of two parts:

- 1 the **internal virtual work** done by internal forces (stresses),
- 2 the **external virtual work** done by external forces (i.e., loads).

# Principle of virtual work

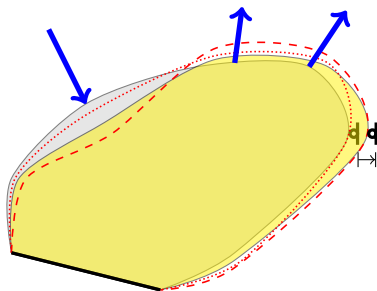

- undeformed configuration,  $u = 0$
- actual configuration,  $u = \bar{u}$
- admissible configuration,  $u = \bar{u} + \delta u$
- external forces (loads)
- ⋯ virtual displacements,  $\delta u$
- admissible configuration,  $u = \bar{u} + \delta u$
- ↔ geometric constraint

## Theorem (Principle of virtual work)

*A continuous body is in equilibrium if and only if the virtual work of all forces, internal and external, acting on the body is zero in a virtual displacement:*

$$\delta W = \delta W_{int} + \delta W_{ext} = 0.$$